



Multi Drills

0.3 - 0.35 kW (0.4 - 0.5 hp) - 550 to 5500 rpm


Interchangeable lever included

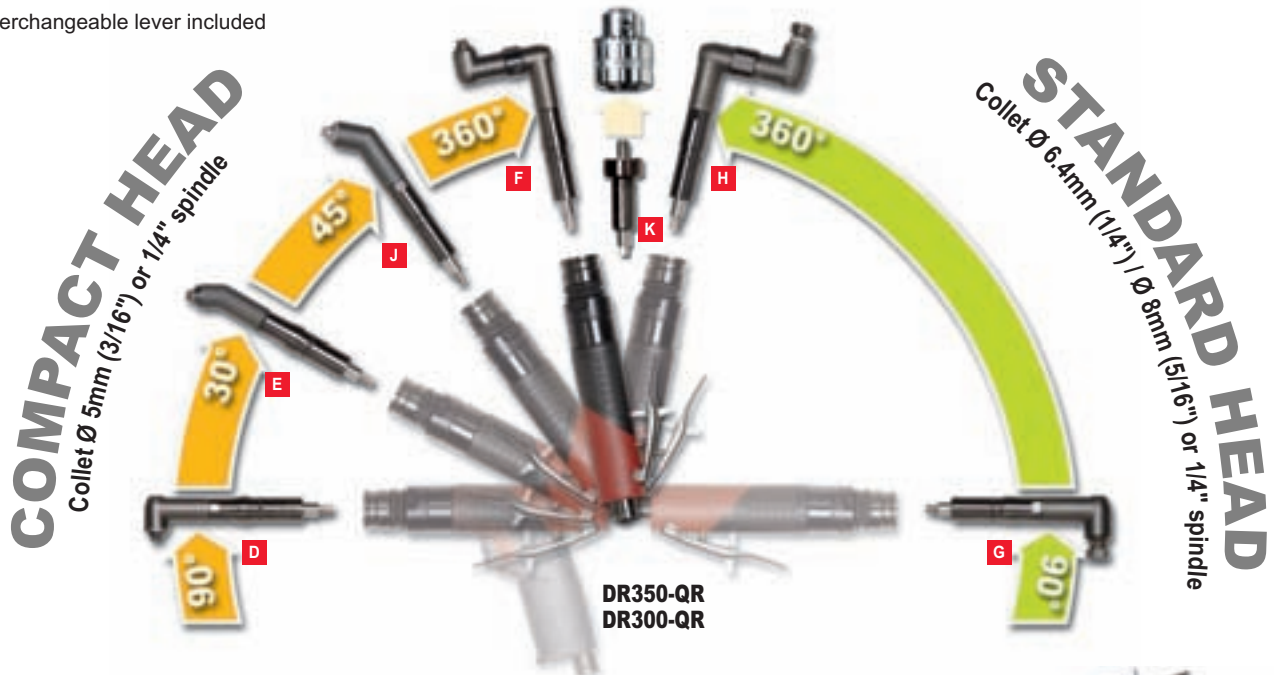


Quick-Release head



12 positions, 360° orientation

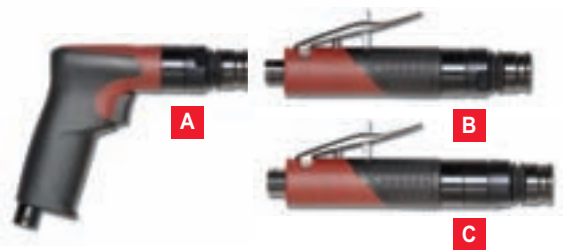

PIC REF	MODEL	PART NUMBER	FREE SPEED		MOTOR POWER		STALL TORQUE		WEIGHT		AIR FLOW		AIR INLET		HOSE INT. Ø	
			rpm		kW	hp	Nm	in.lb.	kg	lb	l/s	cfm	in.	mm	in.	
MULTI DRILLS																
A	DR350-P3000-QR	205 147 528 4	3000		0.35	0.5	4.0	35.4	0.50	1.10	9.5	20	1/4	6	1/4	
B	DR300-T5500-QR	205 147 527 4	5500		0.30	0.4	2.3	20.4	0.50	1.10	9.5	20	1/4	6	1/4	
B	DR300-T4500-QR	205 147 526 4	4500		0.30	0.4	2.7	23.9	0.50	1.10	9.5	20	1/4	6	1/4	
B	DR300-T3000-QR	205 147 525 4	3000		0.30	0.4	4.0	35.4	0.50	1.10	9.5	20	1/4	6	1/4	
B	DR300-T2000-QR	205 147 524 4	2000		0.30	0.4	5.4	47.8	0.50	1.10	9.5	20	1/4	6	1/4	
C	DR300-T1000-QR	205 147 523 4	1000		0.30	0.4	12.7	112.4	0.58	1.27	9.5	20	1/4	6	1/4	
C	DR300-T550-QR	205 147 522 4	550		0.30	0.4	18.6	164.6	0.58	1.27	9.5	20	1/4	6	1/4	

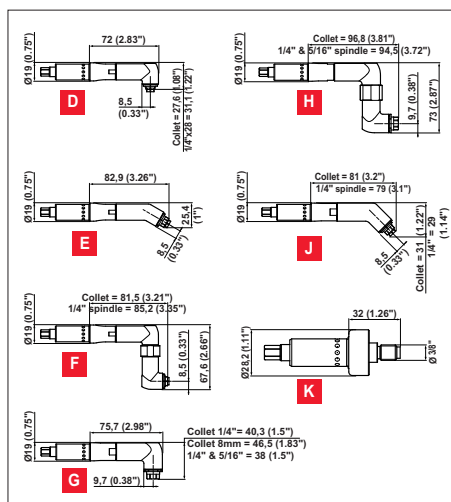

PIC	PART NUMBER	DESIGNATION	COLLET MAX. CAPACITY		WEIGHT	
			mm	in.	kg	lb
D	205 050 331 3	Compact 90° Angle Head - Collet spindle	5.0	3/16	0.17	0.37
D	205 050 332 3	Compact 90° Angle Head - 1/4" x 28 spindle			0.17	0.37
E	205 050 329 3	Compact 30° Angle Head - Collet spindle	5.0	3/16	0.17	0.37
E	205 050 330 3	Compact 30° Angle Head - 1/4" x 28 spindle			0.17	0.37
F	205 050 333 3	Compact 360° Angle Head - Collet spindle	5.0	3/16	0.25	0.55
F	205 050 334 3	Compact 360° Angle Head - 1/4" x 28 spindle			0.25	0.55
G	205 050 338 3	Standard 90° Angle Head - Collet spindle	6.4	1/4	0.23	0.51
G	205 050 353 3	Standard 90° Angle Head - Collet spindle	8.0	5/16	0.24	0.53
G	205 050 339 3	Standard 90° Angle Head - 1/4" x 28 spindle			0.23	0.51
G	205 050 340 3	Standard 90° Angle Head - 5/16" x 24 spindle			0.23	0.51
H	205 050 341 3	Standard 360° Angle Head - Collet spindle	6.4	1/4	0.32	0.70
H	205 050 342 3	Standard 360° Angle Head - 1/4" x 28 spindle			0.32	0.70
H	205 050 343 3	Standard 360° Angle Head - 5/16" x 24 spindle			0.32	0.70
J	205 050 335 3	Compact 45° Angle Head - Collet spindle	5.0	3/16	0.23	0.51
J	205 050 336 3	Compact 45° Angle Head - 1/4" x 28 spindle			0.23	0.51
K	205 050 543 3	Chuck mounting 3/8" x 24 UNF			0.25	0.55